

„SPLIT“ TYPE SYSTEMS

NØRDIS NOVA air conditioners

DC-INVERTER

Quieter and more powerful;

Efficient operation when the outdoor temperature drops to **-25°C**;

Ecological R32 refrigerant;

Energy class **A+++/A++**;

3 year warranty;

Subtle design **white** or **black** panel with hidden LED screen;

USB-WIFI;

Gentle cool wind blades;

Multifunctional and photocatalytic filters*;

Built in **LED UVC and an ionizer** on the evaporator, it kills bacteria by damaging their DNA.



Model	Cooling capacity, kW	Heating capacity, kW	Refrigerant liquid pipe	Holder dimensions, mm	Recommended retail price EUR without VAT**
Nova NOV09TC1	2,61	3,00	1/4"-3/8"	420x700	652,89
Nova NOV12TC1	3,51	3,80	1/4"-3/8"	465x800	736,91
Nova NOV18TC1	5,10	5,80	1/4"-1/2"	550x800	1122,59
Nova NOV24TC1	6,91	7,10	1/4"-1/2"	550x800	1384,30
Nova NOV09TC1 Black	2,61	3,00	1/4"-3/8"	420x700	658,33
Nova NOV12TC1 Black	3,51	3,80	1/4"-3/8"	465x800	750,00
Nova NOV18TC1 Black	5,10	5,80	1/4"-1/2"	550x800	1150,00
Nova NOV24TC1 Black	6,91	7,10	1/4"-1/2"	550x800	1408,33

* Multifunctional filter – it's composed of 3 filters (6 different types), including acaro bacterium filter, silver ion filter, catechin filter, chitin filter, formaldehyde removal filter and vitamin C filter, meeting your various need simultaneously. Photocatalytic filter – this filter is able to completely oxidize and degrade organic contaminants. It can effectively eliminate 99.9% of bacteria, viruses and unpleasant odors.

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.



„SPLIT“ TYPE SYSTEMS

NØRDIS ORION PRO air conditioners

DC-INVERTER

Efficient operation when the outdoor temperature drops to **-25°C**;

Ecological R32 refrigerant;

Energy class **A++/A+**;

3 year warranty;

Stylish panel with hidden LED display;

USB-WIFI;

Gentle cool wind blades;

Multifunctional and photocatalytic filters*;

Built in **LED UVC** on the evaporator, it kills bacteria by damaging their DNA.



Model	Cooling capacity, kW	Heating capacity, kW	Refrigerant liquid pipe	Holder dimensions, mm	Recommended retail price EUR without VAT**
Orion Pro OP09TC1	2,6	2,6	1/4"-3/8"	420x700	546,67
Orion Pro OP12TC1	3,5	3,5	1/4"-3/8"	465x800	623,33
Orion Pro OP18TC1	5,1	5,2	1/4"-3/8"	550x800	986,67
Orion Pro OP24TC1	6,8	7,0	1/4"-1/2"	550x800	1246,67

* Multifunctional filter – it's composed of 3 filters (6 different types), including acaro bacterium filter, silver ion filter, catechin filter, chitin filter, formaldehyde removal filter and vitamin C filter, meeting your various need simultaneously. Photocatalytic filter – this filter is able to completely oxidize and degrade organic contaminants. It can effectively eliminate 99.9% of bacteria, viruses and unpleasant odors.

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.



„SPLIT“ TYPE SYSTEMS

NØRDIS ALTAIR PLUS air conditioners

DC-INVERTER

Efficient operation when the outdoor temperature drops to **-22°C**;

Ecological R32 refrigerant;

Energy class **A++/A+**;

3 year warranty;

New indoor unit panel design;;

WiFi;

Supplied with activated carbon filter;

Supplied with electric heaters of compressor and bottom chassis.



Model	Cooling capacity, kW	Heating capacity, kW	Refrigerant liquid pipe	Holder dimensions, mm	Recommended retail price EUR without VAT**
Altair Plus A09TC1	2,63	2,75	1/4"-3/8"	420x700	528,93
Altair Plus A12TC1	3,4	3,42	1/4"-3/8"	465x800	574,38
Altair Plus A18TC1	5,1	5,1	1/4"-3/8"	550x800	836,08
Altair Plus A24TC1	6,81	6,87	1/4"-1/2"	550x800	1053,72

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.



„SPLIT“ TYPE SYSTEMS



BY CUSTOMER REQUEST – SIRIUS MODELS ARE BACK!

NØRDIS SIRIUS air conditioners DC-INVERTER

Efficient operation when the outdoor temperature drops to **-15°C**;

Ecological R32 refrigerant;

Energy class **A++/A+**;

3 year warranty;

An exclusive design panel with a stylish **LED screen**;

“I Feel” function for smart temperature control.



Model	Cooling capacity, kW	Heating capacity, kW	Refrigerant liquid pipe	Holder dimensions, mm	Recommended retail price EUR without VAT**
Sirius S09TC1	2,60	2,61	1/4"-3/8"	420x700	425,63
Sirius S12TC1	3,40	3,42	1/4"-3/8"	465x800	468,32
Sirius S18TC1	5,10	5,10	1/4"-3/8"	550x800	757,58
Sirius S24TC1	6,80	6,87	1/4"-1/2"	550x800	950,42
Wi-Fi module					16,52

* remote control of the device requires additional integration of the Wi-Fi module. Please contact NØRDIS sales representatives to purchase an additional Wi-Fi module..

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.

NORDIS ORION PRO MULTI-SPLIT air conditioning systems MULTISPLIT DC-INVERTER

Has the ability to connect multiple indoors units;
Efficient operation when the outdoor temperature drops to **-20°C**;

Ecological R32 refrigerant;

Energy class **A++/A+**;

3 year warranty;


Stylish panel with hidden LED display;

USB-WIFI;

Gentle cool wind blades;

Multifunctional and photocatalytic filters*;

Built in **LED UVC** LED UVC on the evaporator, it kills bacteria by damaging their DNA.

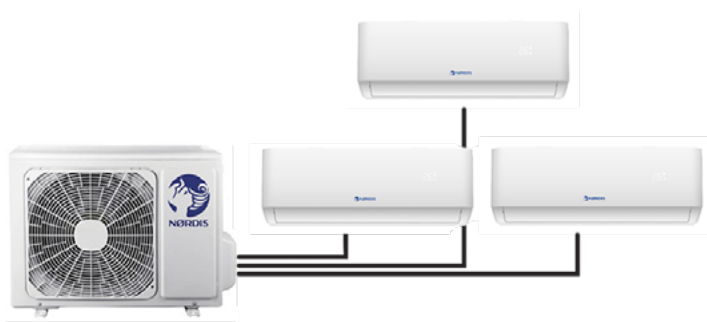

Model	Cooling capacity, kW	Heating capacity, kW	Recommended retail price EUR without VAT**
WALL INDOOR UNITS FOCUS PANEL WIFI			
Indoor OP09TC1	2,6	2,6	210,00
Indoor OP12TC1	3,5	3,5	229,25
Indoor OP18TC1	5,1	5,2	300,65
OUTDOOR MULTI UNITS			
Outdoor FMA-14I2HD/DVO x2	4,1	4,31	717,50
Outdoor FMA-18I2HD/DVO x2	5,1	5,20	785,00
Outdoor FMA-27I3HD/DVO x3	7,9	7,96	1137,33
Outdoor FMA-32I3HD/DVO x4	9,4	9,45	1386,67



* Multifunctional filter – it's composed of 3 filters (6 different types), including acaro bacterium filter, silver ion filter, catechin filter, chitin filter, formaldehyde removal filter and vitamin C filter, meeting your various need simultaneously. Photocatalytic filter – this filter is able to completely oxidize and degrade organic contaminants. It can effectively eliminate 99.9% of bacteria, viruses and unpleasant odors.

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.



NØRDIS console conditioners

Efficient heating **UP TO -20°C.**

Effective cooling **UP TO 50°C.**

Direction for **AIR FLOW CAN BE IN TWO PATTERNS:** both up and down or up only.

The downward air outlet design allows hot air to be dispersed across the floor when the unit is in heating mode to greatly **IMPROVE HEATING PERFORMANCE.**

Nordis's unique large centrifugal fan blade eliminates unnecessary noise and allows for smooth operation.



Model	Cooling capacity, kW	Heating capacity, kW	Refrigerant liquid pipe	Recommended retail price EUR without VAT**
NIR-NOA 12	3,52	3,81	1/4"-3/8"	1132,23

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.

NØRDIS cassette air conditioners

Efficient heating **UP TO -20°C**.

Effective cooling **UP TO 50°C**.

BIONIC PRINCIPLE optimum aerodynamic performance is achieved, resulting in a significant reduction in noise levels.

The unique design of the airflow louvre with DC fan allows the cool air to spread in **360° DIRECTIONS**.

Thanks to **INSIGHT SENSORIC** intensive cooling will only start when the room is occupied.

When you switch the unit back on, the airflow louvres will return to their **PREVIOUS POSITION**. The cooling settings are the same every time.

Heating at -20°C ambient with heating chassis and electric heating belt.



Model	Cooling capacity, kW	Heating capacity, kW	Refrigerant liquid pipe	Recommended retail price EUR without VAT**
NIC-NOA 12	3,52	3,81	1/4"-3/8"	1272,06
NIC-NOA 18	5,28	5,57	1/4"-1/2"	1451,68
NIC-NOA 24	7,03	7,62	3/8"-5/8"	1826,16
NIC-NOA 30	8,79	9,38	3/8"-5/8"	2377,46
NIC-NOA 36	10,55	11,14	3/8"-5/8"	2724,61
NIC-NOA 36-3	10,55	11,14	3/8"-5/8"	2649,57
NIC-NOA 42	12,02	13,48	3/8"-5/8"	2895,90
NIC-NOA 48-3	14,07	16,12	3/8"-5/8"	3204,69
NIC-NOA 55-3	15,24	18,17	3/8"-5/8"	3363,57

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.



NØRDIS floor-ceiling air conditioners

Efficient heating **UP TO -20°C**.

Effective cooling **UP TO 50°C**.

3D AIRFLOW. The unit has an automatic horizontal and vertical air distribution function to ensure even airflow.

4-WAY AIR INTAKE helps circulate the air throughout the room, keeping it clean and maintaining an even temperature.

During heating, the air is directed downwards and distributed over the entire floor area. This improves **HEATING EFFICIENCY**.

Heating at -20°C ambient with heating chassis and electric heating belt.



Model	Cooling capacity, kW	Heating capacity, kW	Refrigerant liquid pipe	Recommended retail price EUR without VAT**
NIF-NOA 18	5,28	5,57	1/4"-3/8"	1339,87
NIF-NOA 24	7,03	7,62	3/8"-5/8"	1664,30
NIF-NOA 36	10,55	11,72	3/8"-5/8"	2565,95
NIF-NOA 36-3	10,55	11,72	3/8"-5/8"	2490,90
NIF-NOA 48-3	14,07	16,12	3/8"-5/8"	3097,08
NIF-NOA 55-3	15,83	18,17	3/8"-5/8"	3249,52

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.

NØRDIS ducted air conditioners

Efficient heating **UP TO -20°C**.

Effective cooling **UP TO 50°C**.


COMPACT SIZE ESPECIALLY LIGHT indoor unit is almost 20% lighter and 12.5% smaller than a conventional ducted air conditioner.

Unique **GOLD COATING ON THE HEAT EXCHANGER BLADES** is resistant to corrosive agents. It also prevents the growth of bacteria in the unit.

EASY REMOVAL AND INSTALLATION OF THE FILTER at the back of the indoor unit for easy maintenance of the air conditioner.

New **ECCENTRIC FAN**, creates a high static pressure (up to 160Pa), which allows the unit to be installed in larger air supply systems.

Heating at -20°C ambient with heating chassis and electric heating belt.

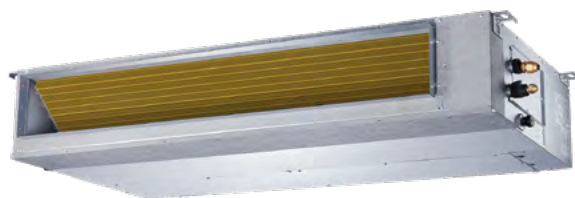

Model	Cooling capacity, kW	Heating capacity, kW	Refrigerant liquid pipe	Recommended retail price EUR without VAT**
NID-NOA 18	5,28	5,57	1/4"-1/2"	1354,27
NID-NOA 24	7,03	7,62	3/8"-5/8"	1599,03
NID-NOA 30	8,79	9,38	3/8"-5/8"	2224,58
NID-NOA 36	10,55	11,72	3/8"-5/8"	2595,74
NID-NOA 36-3	10,55	11,72	3/8"-5/8"	2520,68
NID-NOA 48-3	14,07	16,12	3/8"-5/8"	3129,77

** Actual rates applied vary between EU countries and between certain types of products. The most reliable source of information on current VAT rates for a specified product in a particular EU country is that country's VAT authority.